



2128P *Bluetooth*[®] UHF RFID Reader

High Performance, Long Range RFID reading with the convenience of ePop-Loq[®] connectivity and charging

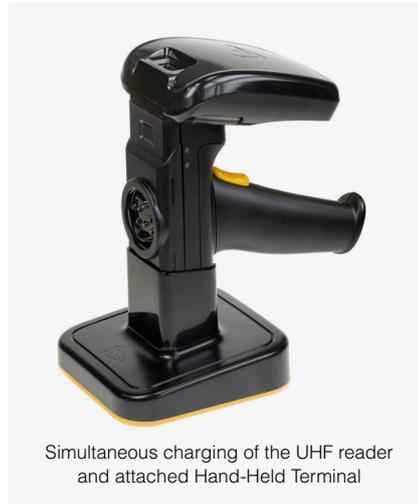

Simultaneous charging of the UHF reader and attached Hand-Held Terminal

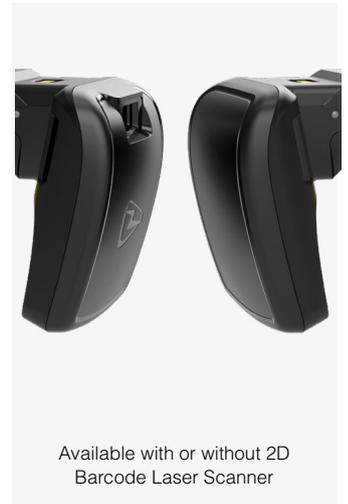

Available with or without 2D Barcode Laser Scanner

High Performance RFID Reading

The fixed High Gain Antenna provides up to 9m (29.5ft) of read range.

Enhanced Modes of Operation

The 2128P UHF RFID Reader can provide in-reader tag de-duplication for more than 50,000 unique tags from more than 1 million tag reads. In addition the Reader can store on-board (using the embedded micro SD card) more than 500 million unique tags with date and time stamping for a truly powerful batch collection mode of operation.

Sophisticated user feedback and embedded processes and accelerometers provide the most configurable, in-depth and capable 'search and find' features currently available.

Connect Devices Using ePop-Loq[®]

The 2128P UHF RFID Reader features the new TSL[®] ePop-Loq[®] connector. The patented ePop-Loq[®] system allows data and charge connections to be passed from the reader to an attached device, such as a smartphone or handheld terminal.

The unique ePop-Loq[®] system is designed to safely separate when the reader is subject to large impacts, such as when dropped.

Single Point Charge Solution

The 2128P Docking Station allows charging of both the 2128P UHF RFID Reader and a smartphone or handheld terminal attached via an ePop-Loq[®] mount. This unique design can accommodate a wide range of devices from many handheld and smartphone manufacturers. The 2128P Docking Station Kit is supplied separately and includes the docking station, power supply unit and a USB data cable.

Powerful and Comprehensive Software Development Tools

Applications developed for the 1128, 2128, 2128P 1153, 1166 or 2166 UHF RFID Readers can easily be configured to work with the 2128L, as all of these readers share TSL's unique 'ASCII 2 Protocol'. This sophisticated, parameterised set of commands carry out multiple actions locally within the reader. This approach enables multiple tag operations to be executed using simple pre-configured ASCII 2 commands which not only speeds integration of the reader into applications but also makes application development easier.

Flexible *Bluetooth*[®] Connectivity

The 2128P supports both *Bluetooth*[®] Classic as well as *Bluetooth*[®] Low Energy (BLE). The reader can be operated in Serial Port Profile (SPP) or Human Interface Device mode (HID), as well as supporting iApp2 for Apple iOS devices. The reader also supports an automatic re-connect mode for both Android and Apple devices.

Ultra Secure Data Gathering Option

As the ePop-Loq[®] system provides a wired connection between the host device and RFID Reader, sensitive data can be given that extra level of security by avoiding the use of wireless data transfer. The 2128P supports batch data collection and is equipped with a Micro SD socket and a real time clock. Up to 500 million transponder EPCs can be stored on a 32GB Micro SD card (optional purchase). This provides the ability to collect and log data even if USB or *Bluetooth*[®] communication channels are not available. Docking the 2128P then enables this data to be synchronised with a PC.

Features:

Long Range UHF RFID Reader

UHF RFID and 2D barcode data capture in a single device.

Hardware Platform Independence

Operates with wide variety of *Bluetooth*[®] wireless technology enabled host devices from smartphones to tablets, laptops and desktop computers.

OS Independence

The reader is compatible with Android, iOS and Windows.

Integrated ePop-Loq[®] Socket

A smarter way of mounting devices to the UHF RFID reader.

Bluetooth LE Support

Lower power consumption and longer battery life.

Direct USB Connection

For increased security of data transfer via ePop-Loq[®] mounts.

Lightweight

Only 400g (14.1oz) including battery, trigger handle and 2D Imager.

High Performance Barcode Scanning

Integrated 2D imaging engine provides class leading barcode scan performance via its unique patent pending fast pulse illumination which delivers outstanding motion tolerance and class leading 1D and 2D data capture.



2128P Specifications

Physical and Environmental Characteristics

Dimensions:	158 x 98 x 170 mm (LxWxH).
Weight:	445 g (including Trigger Handle & battery). 507 g (including Power Handle & battery).
User input:	Trigger button.
User feedback:	Speaker, vibration motor, LED - user configurable.
Power:	Removable, rechargeable 3.7 volt 2250 mAh Lithium Polymer pack. (Optional Power Handle with 6700 mAh Lithium Polymer pack available).
Input Rating:	5.2VDC, 4.0A.
Enclosure materials:	Polycarbonate.

Performance Characteristics

RFID engine:	TSL [®] custom module.
Communication protocols:	TSL [®] ASCII 2.0 parameterised command set and Impinj binary protocol.
Memory:	Optional Micro SD card (maximum 32GB capacity supported). Up to 500 million date and time stamped EPCs can be stored on a 32GB Micro SD card (separate purchase from alternative supplier).
Compatible Host devices (Bluetooth [®]):	Any Bluetooth [®] Host ¹ supporting the Serial Port Profile (SPP) or Human Interface Device (HID) profile (Android, iOS, Linux, Mac, Windows). See Bluetooth[®] Mode Comparison .
Compatible Host devices (USB):	Any USB host with FTDI VCP driver support (Windows, Linux, Mac, Android).

Environmental

Operating Temp.:	-10°C to 50°C (14°F to 122°F).
Charging Temp.:	Standard Trigger Handle (with Varta XL battery): 5°C to 40°C (41°F to 104°F). Power Handle: 0°C to 45°C (32°F to 113°F).
Storage Temp.:	Less than 1 month at -20°C to +45°C (-4°F to 113°F). Less than 6 months at -20°C to +35°C (-4°F to 95°F).
Humidity:	5% to 85% non-condensing.
Drop Spec:	Multiple drops to concrete: 4 ft./1.2 m ambient, 3ft / 0.9m across the operating temperature range.
Tumble:	500 0.5 metre tumbles at room temperature (1,000 cycles).
Electrostatic Discharge (ESD):	± 15kVdc air discharge; ± 8kVdc contact discharge.
MIL-STD 810F:	Meets and exceeds applicable MIL-STD 810F for drop, tumble and sealing.

RFID Performance

Standards supported:	EPC Class 1 Gen 2.
Nominal read range ² :	Up to 9 m (29.5 ft).
Nominal write range ² :	Up to 4 m (13.1 ft).

Field:	150-degree forward facing.
Antenna:	Right Hand Circularly Polarized with optional 2D scanner.
Frequency Range:	865 - 868 MHz (EX1/ES1 variant). 902 - 928 MHz (AX1/AS1 variant).
Maximum Output Power:	34 dBm EIRP ³ .

Barcode Scanning

Barcode module:	Optional 2D imager.																		
Sensor Resolution:	1280 x 960 pixels.																		
Field of View:	Horizontal: 48°, Vertical: 36.7°.																		
Focal Distance:	From front of engine: 7.38 in (187.5 mm).																		
Aiming LED (VLD):	655 nm Laser.																		
Illumination:	2X Warm white LEDs.																		
Symbologies Supported:	1D: All major codes 2D: PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX).																		
Ranges ⁴ :	<table border="1"> <thead> <tr> <th>Barcode</th> <th>Near</th> <th>Far</th> </tr> </thead> <tbody> <tr> <td>3 mil Code 39</td> <td>7.1 cm</td> <td>15.8 cm</td> </tr> <tr> <td>6.67 mil PDF417</td> <td>5.6 cm</td> <td>26.9 cm</td> </tr> <tr> <td>10 mil DataMatix</td> <td>6.1 cm</td> <td>26.9 cm</td> </tr> <tr> <td>15 mil Code 128</td> <td>6.1 cm</td> <td>64.0 cm</td> </tr> <tr> <td>20 mil Code 39</td> <td>4.1 cm</td> <td>92.2 cm</td> </tr> </tbody> </table>	Barcode	Near	Far	3 mil Code 39	7.1 cm	15.8 cm	6.67 mil PDF417	5.6 cm	26.9 cm	10 mil DataMatix	6.1 cm	26.9 cm	15 mil Code 128	6.1 cm	64.0 cm	20 mil Code 39	4.1 cm	92.2 cm
Barcode	Near	Far																	
3 mil Code 39	7.1 cm	15.8 cm																	
6.67 mil PDF417	5.6 cm	26.9 cm																	
10 mil DataMatix	6.1 cm	26.9 cm																	
15 mil Code 128	6.1 cm	64.0 cm																	
20 mil Code 39	4.1 cm	92.2 cm																	

Communication

Bluetooth [®] :	Bluetooth [®] Version 4.2.
Bluetooth [®] Profiles:	SPP Profile, HID Profile, Apple iAP2, Bluetooth [®] Low Energy.
Bluetooth [®] Range:	Up to 100m.
Bluetooth [®] Pairing:	Simple Secure Pairing, NFC OOB Pairing.
Direct USB	USB connection to handheld terminal via ePop-Loq [®] cases (separate purchase).

Peripherals and Accessories

External interface:	Custom connector - requires 2128 Docking Station for battery charging, and USB connectivity.
USB operating modes:	Tethered for real time data capture in conjunction with SmartWedge software. Download of stored scan data.
Desktop charger:	TSL [®] 2128 Docking Station (separate purchase).
Power Handle	Alternative trigger handle gives approximately 3X the original battery capacity.

¹ Compatible Bluetooth[®] stack required in the Host device

² Tag Read/Write performance is dependent on tag type, items tagged, number of tags in the field and other radio and environmental factors

³ 34 dBm EIRP or maximum for regulatory region

⁴ Artificial lighting can affect scanning performance

Other Accessories:	New ePop-Loq® cases can be ordered by special request (volume dependent, lead times apply).
--------------------	---

Regulatory

EMI/EMC FCC:	47 CFR Part 15B 15.107, 15.109 ICES-003 Issue 6 EN 55032:2015 +AC:2016, EN 55024:2010 +A1:2015, EN 301 489-1 V2.1.1
Electrical Safety:	IEC 62368-1:2014 CB EN 62368-1:2014 +AC:2015
RF Exposure:	47 CFR Part 2.1091, OET Bulletin 65 RSS-102 EN 50566:2017
RFID/Bluetooth:	47 CFR Part 15C 15.247 RSS-247 EN 300 328 V2.1.1, EN 302 208 V3.1.1, EN 301 489-17 V3.1.1, EN 301 489-3 V2.1.1

Part Numbers

2128P-ES1 (ETSI) 2128P-AS1 (FCC)	2128P <i>Bluetooth</i> ® UHF Reader with 2D Imager, High Gain UHF Antenna, Trigger Handle, Battery.
2128P-EX1 (ETSI) 2128P-AX1 (FCC)	2128P <i>Bluetooth</i> ® RFID Reader with High Gain UHF Antenna (No Imager), Trigger Handle, Battery.
2128-CRD	Docking Station, Power Supply and Mini USB cable.

Warranty

The TSL® 2128P reader is warranted against defects in workmanship and materials for a period of one year (12 months) from date of shipment, provided the product remains unmodified and is operated under normal and proper conditions.

TSL® RFID Apps

-  **RFID Explorer**
www.tsl.com/apps/rfid-explorer
-  **RFID Tag Finder**
www.tsl.com/apps/rfid-tag-finder
-  **RFID Web Wedge**
www.tsl.com/apps/rfid-web-wedge
-  **RFID Scan Scan Write**
www.tsl.com/apps/rfid-scan-scan-write
-  **TSL® Reader Configuration**
www.tsl.com/apps/tsl-reader-configuration



Integrated ePop-Loq® socket

Terms

"Made for iPod," "Made for iPhone," and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance. iPad, iPhone, iPod and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.

The *Bluetooth*® word mark and logos are registered trademarks owned by *Bluetooth* SIG, Inc. and any use of such marks by Technology Solutions UK Ltd is under license. Other trademarks and trade names are those of their respective owners.

Mounts

Connect Enterprise Hand-Held Terminals using ePop-Loq® mounts:



About TSL®

Technology Solutions UK Ltd (TSL®) is a leading manufacturer of high performance mobile RFID readers used to identify and track products, assets, data or personnel.

For over two decades, TSL® has delivered innovative data capture solutions to Fortune 500 companies around the world using a global network of distributors and system integrators. Specialist in-house teams design all aspects of the finished products and software ecosystems, including electronics, firmware, application development tools, RF design and injection mould tooling.

TSL® is an ISO 9001:2015 certified company.



ISO 9001: 2015

Contact

Address:	Technology Solutions (UK) Limited, Suite A, Loughborough Technology Centre, Epinal Way, Loughborough, Leicestershire, LE11 3GE, United Kingdom.
Telephone:	+44 1509 238248
Fax:	+44 1509 214144
Email:	enquiries@tsl.com
Website:	www.tsl.com

Copyright © 2020 Technology Solutions (UK) Ltd. All rights reserved. Technology Solutions (UK) Limited reserves the right to change its products, specifications and services at any time without notice.